

15.0" RACK MOUNT LCD MONITOR

29LR151A71UN/1

DATASHEET

RACK MOUNT LCD MONITORS

KME has developed a comprehensive range of Rack mountable LCD Monitors for Industrial applications. Our philosophy is quite simple – we use LCD monitor Heads (29LM series) from our existing flat-panel industrial monitor range and integrate them with metal panels to industry-standard dimensions.

Rack Mount Monitors have a full range of controls at the front and standard spaced holes for 19" rack mounting. As a general rule Rack mounted monitors are normally supplied finished in RAL 7035. We know that there will be occasions when this standard range is not exactly suited to all customer requirements – and we remain willing to customise colours or dimensions to market demands.

SOLUTIONS FOR RACK MOUNT MONITORS

- > Standard 19" Equipment Rack Dimensions
- > Painted in RAL 7035 (other colours available)
- > Adjustment Controls at the front
- > High grade Chrome handles available as option
- > Toughened Non-Glare Safety Glass



15.0" RACK MOUNT

DATASHEET

LCD MONITOR

29LR151A71UN/1

Electrical Description		Mechanical Description	
TFT Characteristics:		Dimensions:	Weight: 6.5Kg
Type:	AM Colour TFT	Input:	15D BNC x5, 9D
Max Resolution:	1024 x 768 pixels	Housing	Painted aluminium
Active Display Area:	304 x 228 mm	User Controls:	Front Mounted
No. Colours:	16 million	On Screen buttons	Brightness, Contrast, H/V Position & Size, Frequency, Frequency Fine
Contrast Ratio:	450:1 typical		
Brightness:	250cd/m ² typical		
Viewing Angles (at CR>10):	130 o H, 110 o V		
Backlight Life:	50,000 hours typical		
Clock Rate:	112MHz max		
Sync. Type/Level:	Separate H&V (+/-ve) TTL or Composite (-ve) TTL or Sync-on-Green (-ve) 0.3V		
Signal Sync:	Analog RGB 0.7-1.0Vp-p or TTL RGB >2.75Vp-p		
Synchronisation Range:			
Horizontal scan:	15-60kHz		
Vertical scan:	40-100Hz		
Power Supply:	90-260V 50/60Hz		
Power Consumption:	35W Max	Part Numbers:	
Environmental:		Rack Mount Model:	29LR151A71UN/1
Storage Temp:	-20 to 60°C		
Operating Temp:	0 to 50°C		
Due to a policy of continuous product development KME reserves the right to change specifications and descriptions without prior notification. All trademarks acknowledged.			

KENT MODULAR ELECTRONICS LTD

621 Maidstone Road

Rochester, Kent ME1 3QJ

T: +44 (0)1634 830123 F: +44 (0)1634 830619

E: sales@kme.co.uk W: www.kme.co.uk




15.0" RACK MOUNT

DATASHEET


LCD MONITOR

29LR151A71UN/1

FRONT VIEW

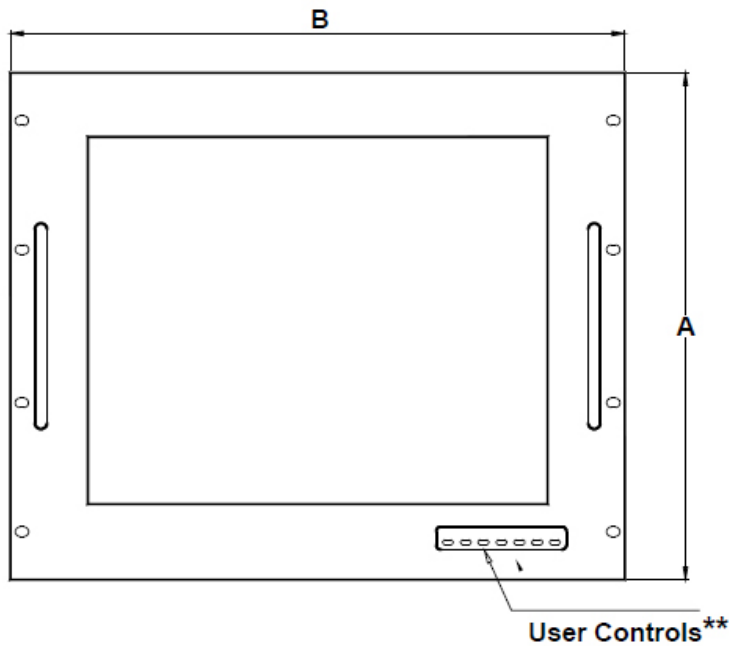

SIDE VIEW

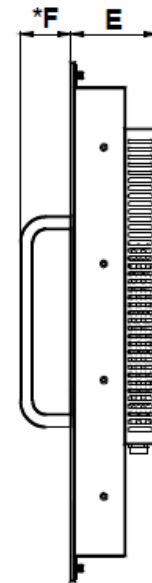

Design Notes:

1. Rack Colour is normally RAL 7035.
2. Rack Metal Thickness is 3mm

* Handles fitted by request – not standard

** Controls on certain monitors are in the centre
(Controls at the rear on 12" monitors)

(Not to Scale)

	RACK MOUNT			
Dimensions (mm)	12.1"	15.0"	17.0"	19.0"
A	266 (6U)	355 (8U)	399 (9U)	399 (9U)
B	483	483	483	483
E	58	63	N/A	69
F	40	40	N/A	40